

PCT/EP200 4 / 021 3371

PA 1172547



# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

May 20, 2004


THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/534,472

FILING DATE: *January 06, 2004*

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

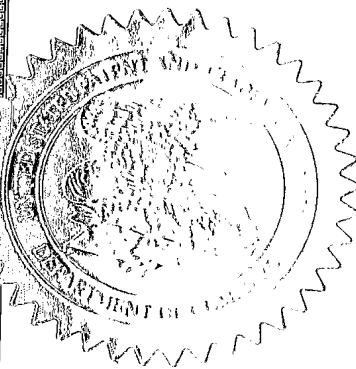

By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

*H. L. Jackson*  
H. L. JACKSON  
Certifying Officer

PATENT APPLICATION SERIAL NO. \_\_\_\_\_

U.S. DEPARTMENT OF COMMERCE  
PATENT AND TRADEMARK OFFICE  
FEE RECORD SHEET

01/09/2004 HBELETE1 00000061 082336 60534472

01 FC:1005 160.00 DA

PTO-1556  
(5/87)

\*U.S. Government Printing Office: 2002 — 489-267/69033

010604

15866 U.S. PTO

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PTO/SB/16 (10-01)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE


This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

**PROVISIONAL APPLICATION FOR PATENT COVER SHEET**

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label N .

ER573872095US

INVENTOR(S)					
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)			
Gianni	Collina	Ferrara, Italy			
Daniele	Evangelisti	Ferrara, Italy			
Mario	Sacchetti	Ferrara, Italy			
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (500 characters max)					
MAGNESIUM DICHLORIDE-ETHANOL ADDUCTS AND CATALYST COMPONENTS OBTAINED THEREFROM					
Direct all correspondence to: <b>CORRESPONDENCE ADDRESS</b>					
<input checked="" type="checkbox"/> Customer Number		34872			
OR		Type Customer Number here			
<input type="checkbox"/> Firm or Individual Name		William R. Reid PATENT TRADEMARK OFFICE			
Address		Basell USA Inc.			
Address		912 Appleton Road			
City	Elkton	State	MD	ZIP	21921
Country	US	Telephone	410-996-1783	Fax	410-996-1560
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification Number of Pages		13		<input type="checkbox"/> CD(s), Number	
<input type="checkbox"/> Drawing(s) Number of Sheets				<input type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76					
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)	
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number.		08-2336		\$160.00	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE William R. ReidTYPED or PRINTED NAME William R. ReidTELEPHONE 410-996-1783Date 01/06/2004REGISTRATION NO.  
(if appropriate)  
Docket Number.

47,894

FE 6159 (US)

**USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT**

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

**EXPRESS MAILING CERTIFICATE**


This certifies that the attached **Form PTO/SB/16** (in duplicate), **Specification (13)** for the provisional application of **Gianni Collina et al.** for **MAGNESIUM DICHLORIDE-ETHANOL ADDUCTS AND CATALYST COMPONENTS OBTAINED THEREFROM** (our ref: **FE 6159 (US)**) is being mailed by "Express Mail Post Office to Addressee" service in an envelope addressed:

Mail Stop Provisional Patent Application  
Commissioner for Patents  
P. O. Box 1450  
Alexandria, VA 22313-1450

and deposited on **JANUARY 6, 2004** as "Express Mail" in the United States Postal Service, the number of the "Express Mail" mailing label being **ER573872095US**.

Douglas Jumps

Typed Name of Person Mailing Paper or Fee

  
Signature of Person

**MAGNESIUM DICHLORIDE-ETHANOL ADDUCTS AND CATALYST COMPONENTS  
OBTAINED THEREFROM**

The present invention relates to magnesium dichloride/ethanol adducts which are characterized by particular chemical and physical properties. The adducts of the present invention are particularly useful as precursors of catalyst components for the polymerization of olefins.

MgCl<sub>2</sub>•alcohol adducts and their use in the preparation of catalyst components for the polymerization of olefins are well known in the art.

Catalyst components for the polymerization of olefins, obtained by reacting MgCl<sub>2</sub>•nEtOH adducts with halogenated transition metal compounds, are described in USP 4,399,054. The adducts are prepared by emulsifying the molten adduct in an immiscible dispersing medium and quenching the emulsion in a cooling fluid to collect the adduct in the form of spherical particles. No physical characterization regarding the degree of cristallinity of the adducts are reported.

In WO 98/44009 are disclosed MgCl<sub>2</sub>•alcohol adducts having improved characteristics and characterized by a particular X-ray diffraction spectrum, in which, in the range of 2θ diffraction angles between 5° and 15°, the three main diffraction lines are present at diffraction angles 2θ of  $8.8 \pm 0.2^\circ$ ,  $9.4 \pm 0.2^\circ$  and  $9.8 \pm 0.2^\circ$ , the most intense diffraction lines being the one at  $2\theta = 8.8 \pm 0.2^\circ$ , the intensity of the other two diffraction lines being at least 0.2 times the intensity of the most intense diffraction line. Said adducts can be of formula MgCl<sub>2</sub>•mEtOH•nH<sub>2</sub>O

where m is between 2.2 and 3.8 and n is between 0.01 and 0.6. In addition to the above described X-ray spectrum, the above described adducts are characterized by a Differential Scanning Calorimetry (DSC) profile in which no peaks are present at temperatures below 90°C or, even if peaks are present below said temperature, the fusion enthalpy associated with said peaks is less than 30% of the total fusion enthalpy.

These adducts are obtained by specific preparation methods involving the reaction between MgCl<sub>2</sub> and alcohol under conditions including long reaction times and absence of inert diluents or use of vaporized alcohol. Nothing is said, in the working examples, about the water content. The catalyst components obtained from these adducts have an increased activity over those obtained from the adducts of the prior art. However, the availability of catalyst components with still improved activity is always needed in view of the economic advantages obtainable in the operation of the industrial plants.

In the international application WO03/082930 are described MgCl<sub>2</sub>•mEtOH adducts in which m is from 2.5 to 3.2 optionally containing water up to a maximum of 1%wt based on the total weight of the

adduct, characterized by a DSC profile in which the highest melting Temperature ( $T_m$ ) peak is over 109°C and has an associated fusion enthalpy ( $\Delta H$ ) of 103J/g or lower. The catalyst components obtained from the adducts of the present invention are capable to give catalysts for the polymerization of olefins characterized by enhanced activity with respect to the catalysts prepared from the adducts of the prior art. Although the results are good in order to obtain these adducts a strict control on the water in the system must be applied which can render the process too burdensome. In addition, the associated values of the fusion enthalpy may increase with the time due to the effect of the cristallization tendency and such a behaviour could lead to adducts that upon reaction with transition metal compounds can give catalyst components with somewhat worsened properties. It would be therefore important to find adducts capable to generate catalyst components having high polymerization activity and with a relatively low fusion enthalpy. Moreover, it would be useful if the increase of such relatively low fusion enthalpy would be at least delayed with the time in order to make easier the transformation in a catalyst component with valuable properties.

The present invention therefore relates to adducts comprising  $MgCl_2$ , ethanol and a Lewis base (LB) different from water, said compounds being present in molar ratios defined by the following formula  $MgCl_2 \cdot (EtOH)_n(LB)_p$  in which n is from 2 to 6 and p has values satisfying the following equation  $p/(n+p) \leq 0.1$ .

Preferably, p has values satisfying the following equation  $p/(n+p) \leq 0.05$ , more preferably  $p/(n+p) \leq 0.0125$ .

The Lewis base can be selected from carboxylic acids, amides, aldehydes, esters, ethers, ketones, silanes, amines, alcohol and nitriles. Preferably, the Lewis base is selected from ethers, esters, and compounds of formula  $RX_m$  where R is a hydrocarbon group having from 1 to 20 carbon atoms, X is a  $-NH_2$ , a  $-NHR$  or  $-OH$  group and m is 1 or higher.

R is preferably an alkyl or alkiliden group having from 1 to 10 carbon atoms preferably from 2 to 6 carbon atoms, X is preferably  $-OH$  and m ranges from 1 to 6, and preferably is 1, 2 or 3.

Preferred ethers are the C2-C20 aliphatic ethers and in particulars cyclic ethers preferably having 3-5 carbon atoms such as tetrahydrofurane, dioxane. Also suitable are the linear or cyclic aliphatic ethers having two or more ether groups. Preferred esters are the alkyl esters of C1-C10 aliphatic carboxylic acids and in particulars C1-C4 alkyl esters of aliphatic mono carboxylic acids such as ethylacetate and methyl formiate.

Representative examples of compounds of formula  $RX_m$  are methanol, propanol, isopropanol,

n-butanol, i-butanol, sec-butanol, tert-butanol, pentanol, 2-methyl-1-pentanol, 2-ethyl-1-hexanol, phenol, 4-methyl-1-phenol, 2,6-dimethyl-1-phenol, cyclohexanol, cyclopentanol, ethylene glycol, propylene glycol, 1,4-butanediol, glycerine, mannitol, polyvinyl-alcohol, acetonitrile, ethylenediamine, 3-picoline, triethanolamine, triethylamine, diisopropylamine.

5       Representative examples of the other Lewis Basis are acetic acids, acetonitrile formic aldehyde acetamide, formamide.

      Generally, the fusion enthalpy associated to the said adducts is lower than 100 J/g and most preferably in the range 85-95 J/g. As mentioned above, these values are referred to the adducts prepared not earlier than 2 days from the date of measurement. However, the applicant has noticed that  
10   the adducts of the invention have a lower tendency of the fusion enthalpy to increase with the time. For example the increase can be none or limited to only 2-4 J/g after a week.

      Water may be present in these adducts. Its content can be lower than 0.8%wt and preferably lower than 0.6%wt based on the sum of  $MgCl_2$ , ethanol and LB.

      Particularly interesting are the adducts showing, in the DSC profile, only one peak, however,  
15   additional peaks in the 95-98°C region may be present. In the latter case however, the fusion enthalpy associated to them is lower than 30% of the total fusion enthalpy, preferably lower than 20 and more preferably lower than 10%. The DSC analysis is carried out using the apparatus and the methodology described hereinafter.

      It is possible, but not strictly required, that also the adduct of the present invention are  
20   characterized by an X-ray diffraction spectrum in which, in the range of  $2\theta$  diffraction angles between 5° and 15°, the three main diffraction lines are present at diffraction angles  $2\theta$  of  $8.8 \pm 0.2^\circ$ ,  $9.4 \pm 0.2^\circ$  and  $9.8 \pm 0.2^\circ$ , the most intense diffraction lines being the one at  $2\theta = 8.8 \pm 0.2^\circ$ , the intensity of the other two diffraction lines being at least 0.2 times the intensity of the most intense diffraction line.

      The adducts of the present invention can be prepared according to several methods. In  
25   particular the general methods described in WO98/44009 are suitable. If the water content should be reduced a particular attention should be paid to the water content of the reactants. Both  $MgCl_2$  and EtOH are in fact highly hygroscopic and tend to incorporate water in their structure. As a result, if the water content of the reactants is relatively high, the final  $MgCl_2$ -EtOH adducts may contain too high water content even if water has not been added as a separate component. Means for controlling or  
30   lowering the water content in solids or fluids are well known in the art. The water content in  $MgCl_2$  can be for example lowered by drying it in an oven at high temperatures or by reacting it with a compound

which is reactive towards water. As an example, a stream of HCl can be used to remove water from MgCl<sub>2</sub>. Water from the fluids can be removed by various techniques such as distillation or by allowing the fluids to become in contact with substances capable to subtract water such as molecular sieves. Once this precautions have been taken, the reaction between the magnesium chloride and ethanol to  
5 produce the adducts of the invention can be carried out according to various methods.

According to one of these methods the adducts are prepared by dispersing the particles of magnesium dichloride in an inert liquid immiscible with and chemically inert to the molten adduct, heating the system at temperature equal to or higher than the melting temperature of MgCl<sub>2</sub>•ethanol adduct and then adding the desired amount of alcohol in vapour phase. Depending on their physical  
10 properties, the LB can be added either with the MgCl<sub>2</sub> or with the EtOH in gas phase. The temperature is kept at values such that the adduct is completely melted.

The molten adduct is then emulsified in a liquid medium which is immiscible with and chemically inert to it and then quenched by contacting the adduct with an inert cooling liquid, thereby obtaining the solidification of the adduct.

The liquid in which the MgCl<sub>2</sub> is dispersed can be any liquid immiscible with and chemically inert to the molten adduct. For example, aliphatic, aromatic or cycloaliphatic hydrocarbons can be used as well as silicone oils. Aliphatic hydrocarbons such as vaseline oil are particularly preferred. After the MgCl<sub>2</sub> particles are dispersed in the inert liquid, the mixture is heated at temperatures preferably higher than 125°C and more preferably at temperatures higher than 150°C. Conveniently, the vaporized  
15 alcohol is added at a temperature equal to or lower than the temperature of the mixture.

According to another method, the adducts of the invention are prepared by contacting MgCl<sub>2</sub>, the LB and ethanol in the absence of the inert liquid dispersant, heating the system at the melting temperature of the adduct or above, and maintaining said conditions so as to obtain a completely melted adduct. Said molten adduct is then emulsified in a liquid medium which is immiscible with and  
20 chemically inert to it and finally quenched by contacting the adduct with an inert cooling liquid thereby obtaining the solidification of the adduct. In particular, the adduct is preferably kept at a temperature equal to or higher than its melting temperature, under stirring conditions, for a time period equal to or greater than 10 hours, preferably from 10 to 150 hours, more preferably from 20 to 100 hours. Alternatively, in order to obtain the solidification of the adduct, a spray-cooling process of the molten  
25 adduct can be carried out.

All these methods provide solid adducts having a spherical morphology, which are very suitable




in the preparation of spherical catalyst components for the polymerization of olefins and in particular for the gas-phase polymerization process.

The catalyst components to be used in the polymerization of olefins comprise a transition metal compound of one of the groups IV to VI of the Periodic Table of Elements, supported on the adducts of the invention.

A method suitable for the preparation of said catalyst components, comprises the reaction between the adducts of the invention and the transition metal compound. Among transition metal compounds particularly preferred are titanium compounds of formula  $Ti(OR)_nX_{y-n}$  in which n is comprised between 0 and y, y is the valence of titanium; X is halogen and R is an alkyl radical having 1-8 carbon atoms or a COR group. Among them, particularly preferred are titanium compounds having at least one Ti-halogen bond such as titanium tetrahalides or halogenalcoholates. Preferred specific titanium compounds are  $TiCl_3$ ,  $TiCl_4$ ,  $Ti(OBu)_4$ ,  $Ti(OBu)Cl_3$ ,  $Ti(OBu)_2Cl_2$ ,  $Ti(OBu)_3Cl$ . Preferably the reaction is carried out by suspending the adduct in cold  $TiCl_4$  (generally  $0^\circ C$ ); then the so obtained mixture is heated up to  $80-130^\circ C$  and kept at this temperature for 0.5-2 hours. After that the excess of  $TiCl_4$  is removed and the solid component is recovered. The treatment with  $TiCl_4$  can be carried out one or more times.

The reaction between transition metal compound and the adduct can also be carried out in the presence of an electron donor compound (internal donor) in particular when the preparation of a stereospecific catalyst for the polymerization of olefins is to be prepared. Said electron donor compound can be selected from esters, ethers, amines, silanes and ketones. In particular, the alkyl and aryl esters of mono or polycarboxylic acids such as for example esters of benzoic, phthalic, malonic and succinic acid are preferred. Specific examples of such esters are n-butylphthalate, diisobutylphthalate, di-n-octylphthalate, diethyl 2,2-diisopropylsuccinate, diethyl 2,2-dicyclohexylsuccinate, ethyl-benzoate and p-ethoxy ethyl-benzoate. Moreover, can be advantageously used also the 1,3 diethers of the formula:



wherein  $R$ ,  $R^I$ ,  $R^{II}$ ,  $R^{III}$ ,  $R^{IV}$  and  $R^V$  equal or different to each other, are hydrogen or hydrocarbon radicals having from 1 to 18 carbon atoms, and  $R^{VI}$  and  $R^{VII}$ , equal or different from each other, have the same meaning of  $R^V$  except that they cannot be hydrogen; one or more of the  $R$ - $R^{VII}$  groups can be linked to form a cycle. The 1,3-diethers in which  $R^{VI}$  and  $R^{VII}$  are selected from  $C_1$ - $C_4$  alkyl radicals are particularly preferred.

The electron donor compound is generally present in molar ratio with respect to the magnesium comprised between 1:4 and 1:20.

Preferably, the particles of the solid catalyst components have substantially spherical morphology and an average diameter comprised between 5 and 150  $\mu m$ . With the term substantial spherical morphology are meant those particles having a ratio between the greater and smaller axis equal to or lower than 1.5 and preferably lower than 1.3.

Before the reaction with the transition metal compound, the adducts of the present invention can also be subjected to a dealcoholation treatment aimed at lowering the alcohol content and increasing the porosity of the adduct itself. The dealcoholation can be carried out according to known methodologies such as those described in EP-A-395083. Depending on the extent of the dealcoholation treatment, partially dealcoholated adducts can be obtained having an alcohol content generally ranging from 0.1 to 2.6 moles of alcohol per mole of  $MgCl_2$ . After the dealcoholation treatment the adducts are reacted with the transition metal compound, according to the techniques described above, in order to obtain the solid catalyst components.

The solid catalyst components according to the present invention show a surface area (by B.E.T. method) generally between 10 and 500  $m^2/g$  and preferably between 20 and 350  $m^2/g$ , and a total porosity (by B.E.T. method) higher than 0.15  $cm^3/g$  preferably between 0.2 and 0.6  $cm^3/g$ .

The catalyst components of the invention form catalysts for the polymerization of  $\alpha$ -olefins  $CH_2=CHR$ , wherein  $R$  is hydrogen or a hydrocarbon radical having 1-12 carbon atoms, by reaction with Al-alkyl compounds. The alkyl-Al compound is preferably chosen among the trialkyl aluminum compounds such as for example triethylaluminum, triisobutylaluminum, tri-n-butylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum. It is also possible to use alkylaluminum halides, alkylaluminum hydrides or alkylaluminum sesquichlorides such as  $AlEt_2Cl$  and  $Al_2Et_3Cl_3$  optionally in mixture with said trialkyl aluminum compounds.

The Al/Ti ratio is higher than 1 and is generally comprised between 20 and 800.

In the case of the stereoregular polymerization of  $\alpha$ -olefins such as for example propylene and

1-butene, an electron donor compound (external donor) which can be the same or different from the compound used as internal donor can be used in the preparation of the catalysts disclosed above. In case the internal donor is an ester of a polycarboxylic acid, in particular a phthalate, the external donor is preferably selected from the silane compounds containing at least a Si-OR link, having the formula

5  $R^1R^2Si(OR^3)_c$ , where a and b are integer from 0 to 2, c is an integer from 1 to 3 and the sum (a+b+c) is 4;  $R^1$ ,  $R^2$ , and  $R^3$ , are alkyl, cycloalkyl or aryl radicals with 1-18 carbon atoms. Particularly preferred are the silicon compounds in which a is 1, b is 1, c is 2, at least one of  $R^1$  and  $R^2$  is selected from branched alkyl, cycloalkyl or aryl groups with 3-10 carbon atoms and  $R^3$  is a  $C_1$ - $C_{10}$  alkyl group, in particular methyl. Examples of such preferred silicon compounds are methylcyclohexyldimethoxysilane,

10 diphenyldimethoxysilane, methyl-t-butyldimethoxysilane, dicyclopentyldimethoxysilane. Moreover, are also preferred the silicon compounds in which a is 0, c is 3,  $R^2$  is a branched alkyl or cycloalkyl group and  $R^3$  is methyl. Examples of such preferred silicon compounds are cyclohexyltrimethoxysilane, t-butyltrimethoxysilane and hexyltrimethoxysilane.

Also the 1,3 diethers having the previously described formula can be used as external donor.

15 However, in the case 1,3-diethers are used as internal donors, the use of an external donor can be avoided, as the stereospecificity of the catalyst is already sufficiently high.

As previously indicated the components of the invention and catalysts obtained therefrom find applications in the processes for the (co)polymerization of olefins of formula  $CH_2=CHR$  in which R is hydrogen or a hydrocarbon radical having 1-12 carbon atoms.

20 The catalysts of the invention can be used in any of the olefin polymerization processes known in the art. They can be used for example in slurry polymerization using as diluent an inert hydrocarbon solvent or bulk polymerization using the liquid monomer (for example propylene) as a reaction medium. Moreover, they can also be used in the polymerization process carried out in gas-phase operating in one or more fluidized or mechanically agitated bed reactors.

25 The polymerization is generally carried out at temperature of from 20 to 120°C, preferably of from 40 to 80°C. when the polymerization is carried out in gas-phase the operating pressure is generally between 0.1 and 10 MPa, preferably between 1 and 5 MPa. In the bulk polymerization the operating pressure is generally between 1 and 6 MPa preferably between 1.5 and 4 MPa.

The catalysts of the invention are very useful for preparing a broad range of polyolefin products.

30 Specific examples of the olefinic polymers which can be prepared are: high density ethylene polymers (HDPE, having a density higher than 0.940 g/cc), comprising ethylene homopolymers and copolymers

of ethylene with alpha-olefins having 3-12 carbon atoms; linear low density polyethylenes (LLDPE, having a density lower than 0.940 g/cc) and very low density and ultra low density (VLDPE and ULDPE, having a density lower than 0.920 g/cc, to 0.880 g/cc) consisting of copolymers of ethylene with one or more alpha-olefins having from 3 to 12 carbon atoms, having a mole content of units  
5 derived from the ethylene higher than 80%; isotactic polypropylenes and crystalline copolymers of propylene and ethylene and/or other alpha-olefins having a content of units derived from propylene higher than 85% by weight; copolymers of propylene and 1-butene having a content of units derived from 1-butene comprised between 1 and 40% by weight; heterophasic copolymers comprising a  
10 crystalline polypropylene matrix and an amorphous phase comprising copolymers of propylene with ethylene and or other alpha-olefins.

The following examples are given to illustrate and not to limit the invention itself.

### **CHARACTERIZATION**

The properties reported below have been determined according to the following methods:

15 The DSC measurement were carried out with a PERKIN ELMER DSC 7 instrument at a scanning rate of 5°C/min in the range 5-125°C. Aluminum capsules having a volume of 40µl filled with the samples in a dry-box were used in order to avoid hydration of the samples.

The content of alcohol and other LB was determined via GC analysis.

### **EXAMPLES**

#### **General procedure for the preparation of the catalyst component**

20 Into a 1l steel reactor provided with stirrer, 800cm<sup>3</sup> of TiCl<sub>4</sub> at 0°C were introduced; at room temperature and whilst stirring 16 g of the adduct were introduced together with an amount of diisobutylphthalate as internal donor so as to give a donor/Mg molar ratio of 10. The whole was heated to 100°C over 90 minutes and these conditions were maintained over 120 minutes. The stirring was  
25 stopped and after 30 minutes the liquid phase was separated from the sedimented solid maintaining the temperature at 100°C. A further treatment of the solid was carried out adding 750 cm<sup>3</sup> of TiCl<sub>4</sub> and heating the mixture at 120°C over 10 min. and maintaining said conditions for 60 min under stirring conditions (500 rpm). The stirring was then discontinued and after 30 minutes the liquid phase was separated from the sedimented solid maintaining the temperature at 120°C. Thereafter, 3 washings with  
30 500 cm<sup>3</sup> of anhydrous hexane at 60°C and 3 washings with 500 cm<sup>3</sup> of anhydrous hexane at room temperature were carried out. The solid catalyst component obtained was then dried under vacuum in nitrogen environment at a temperature ranging from 40-45°C.

General procedure for the polymerization test

A 4 litre steel autoclave equipped with a stirrer, pressure gauge, thermometer, catalyst feeding system, monomer feeding lines and thermostating jacket, was used. The reactor was charged with 0.01 gr. of solid catalyst component 0,76 g of TEAL, 0.076g of dicyclopentyldimetoxy silane, 3.2 l of propylene, and 1.5 l of hydrogen. The system was heated to 70°C over 10 min. under stirring, and maintained under these conditions for 120 min. At the end of the polymerization, the polymer was recovered by removing any unreacted monomers and was dried under vacuum.

EXAMPLE 1

In a vessel reactor equipped with a IKA RE 166 stirrer containing 136.63 g of anhydrous EtOH, and 0.93 g of butanol at room temperature were introduced under stirring 93.16 g of MgCl<sub>2</sub>. Once the addition of MgCl<sub>2</sub> was completed, the temperature was raised up to 125°C and kept at this value for 3 hours. After that, 1600 cm<sup>3</sup> of OB55 vaseline oil were introduced and, while keeping the temperature at 125°C, the stirring was brought to 1500 rpm and kept at that value for two minutes. After that time the mixture was discharged into a vessel containing hexane which was kept under stirring and cooled so that the final temperature did not exceed 12°C. After 12 hours, the solid particles of the MgCl<sub>2</sub>•EtOH adduct recovered were then washed with hexane and dried at 40°C under vacuum. The compositional analysis showed that they contained 54.2 % by weight of EtOH and 0.3% wt of butanol.

The DSC profile showed a peak at 105.6°C, with an associated fusion enthalpy of 90.1 J/g. The catalyst component, prepared according to the general procedure, was tested according to the general polymerization procedure described above and gave the results reported in Table 1.

EXAMPLE 2

The same procedure as in example 1 was carried out (MgCl<sub>2</sub> 92.64g, ethanol 138.55g) with the difference that the amount of butanol was increased to 2.77 g. The solid particles of the MgCl<sub>2</sub>•EtOH adduct recovered were then washed with hexane and dried at 40°C under vacuum. The compositional analysis showed that they contained 51.1 % by weight of EtOH and 0.7% of butanol.

The DSC profile showed a peak at 107.5°C, with an associated fusion enthalpy of 89.7 J/g. The catalyst component, prepared according to the general procedure, was tested according to the general polymerization procedure described above and gave the results reported in Table 1.

EXAMPLE 3

The same procedure as in example 1 was carried out (MgCl<sub>2</sub> 86.0 g, ethanol 128.34g) with the

difference that 0.86 g of ethylenglycol were used instead of butanol. The solid particles of the  $\text{MgCl}_2 \cdot \text{EtOH}$  adduct recovered were then washed with hexane and dried at 40°C under vacuum. The compositional analysis showed that they contained 57.2 % by weight of EtOH and 0.4% of glycol.

The DSC profile showed a peak at 107.4°C, with an associated fusion enthalpy of 90.1 J/g.

- 5 The catalyst component, prepared according to the general procedure, was tested according to the general polymerization procedure described above and gave the results reported in Table 1

#### **COMPARISON EXAMPLE 1**

- 10 The procedure of Example 1 was repeated with the difference that no butanol was used. The compositional analysis showed that the adduct contained 55.1 % by weight of EtOH. The DSC profile showed a peak at 109°C, with an associated fusion enthalpy of 102 J/g. The catalyst component, prepared according to the general procedure, was tested according to the general polymerization procedure described above and gave the results reported in Table 1.


<b>Table 1</b>			
<b>Example</b>	<b>Activity</b>	<b>LI:</b>	<b>Poured bulk density</b>
1	65.1	97.4	0.41
2	65	98.3	0.41
3	69.6	97.9	0.42
Comp.1	54	98.0	0.376

**CLAIMS**

1. An adduct comprising  $\text{MgCl}_2$ , ethanol and Lewis base (LB) different from water, said compounds being present in molar ratios defined by the following formula  $\text{MgCl}_2 \cdot (\text{EtOH})_n (\text{LB})_p$  in which n is from 2 to 6 and p has values satisfying the following equation  $p/(n+p) \leq 0.1$ .
- 5 2. The adduct according to claim 1 in which p has values satisfying the following equation  $p/(n+p) \leq 0.0125$ .
3. The adduct according to claim 1 in which the LB is selected from ethers, esters, and compounds of formula  $\text{RX}_m$  where R is a hydrocarbon group having from 1 to 20 carbon atoms X is a  $-\text{NH}_2$ , a  $-\text{NHR}$  or  $-\text{OH}$  group and m is 1 or higher.
- 10 4. The adduct of claim 3 in which R is an alkyl or alkiliden group having from 1 to 10 carbon atoms, X is OH and m is from 1 to 6.
5. The adduct of claim 3 in which the compound  $\text{RX}_m$  is selected from the group consisting of methanol, propanol, isopropanol, n-butanol, sec-butanol, tert-butanol, pentanol, 2-methyl-1-pentanol, 2-ethyl-1-hexanol, phenol, 4-methyl-1-phenol, 2,6-dimethyl-1-phenol, cyclohexanol, 15 cyclopentanol, ethylen glycol, propylen glycol, 4-butanediol, glycerine, mannitol, polyvinyl-alcohol, acetonitrile, ethylenediammine, 3-picoline, triethanolammine, triethylammine, diisopropylammine.
6. The adduct according to claim 1 having a fusion enthalpy lower than 100 J/g.
7. The adduct according to claim 1 in which the water content is lower than 0.8%wt.
8. The adduct according to anyone of the preceding claims further characterized by an X-ray 20 diffraction spectrum in which, in the range of  $2\theta$  diffraction angles between  $5^\circ$  and  $15^\circ$ , the three main diffraction lines are present at diffraction angles  $2\theta$  of  $8.8 \pm 0.2^\circ$ ,  $9.4 \pm 0.2^\circ$  and  $9.8 \pm 0.2^\circ$ , the most intense diffraction lines being the one at  $2\theta = 8.8 \pm 0.2^\circ$ , the intensity of the other two diffraction lines being at least 0.2 times the intensity of the most intense diffraction line.
9. The adduct according to claim 1 in form of spheroidal particles.
- 25 10. A catalyst component for the polymerization of olefins comprising the product of the reaction between a transition metal compound and an adduct according to anyone of the preceding claims.
11. A catalyst component according to claim 10 in which the transition metal is selected among titanium compounds of formula  $\text{Ti}(\text{OR})_n \text{X}_{y-n}$  in which n is comprised between 0 and y; y is the valence of titanium; X is halogen and R is an alkyl radical having 1-8 carbon atoms or a COR 30 group.
12. A catalyst component according to claim 11 in which the titanium compound is selected among

$\text{TiCl}_3$ ,  $\text{TiCl}_4$ ,  $\text{Ti}(\text{OBu})_4$ ,  $\text{Ti}(\text{OBu})\text{Cl}_3$ ,  $\text{Ti}(\text{OBu})_2\text{Cl}_2$ ,  $\text{Ti}(\text{OBu})_3\text{Cl}$ .

13. A catalyst component according to claim 10 in which the reaction between the transition metal compound and the adduct is carried out in the presence of an electron donor compound.
14. A catalyst component according to claim 13 in which the electron donor is selected from esters, ethers, amines, and ketones.
15. A catalyst component according to claim 14 in which the electron donor is selected from the alkyl or aryl esters of mono or polycarboxylic acids.
16. A catalyst component according to claim 14 in which the electron donor is selected from 1,3 diethers of the formula:



- wherein R,  $\text{R}^{\text{I}}$ ,  $\text{R}^{\text{II}}$ ,  $\text{R}^{\text{III}}$ ,  $\text{R}^{\text{IV}}$  and  $\text{R}^{\text{V}}$  equal or different to each other, are hydrogen or hydrocarbon radicals having from 1 to 18 carbon atoms, and  $\text{R}^{\text{VI}}$  and  $\text{R}^{\text{VII}}$ , equal or different from each other, have the same meaning of  $\text{R}-\text{R}^{\text{V}}$  except that they cannot be hydrogen; one or more of the  $\text{R}-\text{R}^{\text{VII}}$  groups can be linked to form a cycle.
17. Catalyst for the polymerization of olefins comprising the product of the reaction between a catalyst component according to one of the claims 10 to 16, and an aluminum alkyl compound.
18. Catalyst for the polymerization of olefins according to claim 17 in which the aluminum compound is an Al-trialkyl compound.
19. Catalyst for the polymerization of olefins according to claim 17 further comprising an external donor.
20. Catalyst for the polymerization of olefins according to claim 19 in which the external donor is selected from the silane compounds containing at least a Si-OR link, having the formula  $\text{R}_a^1\text{R}_b^2\text{Si}(\text{OR}^3)_c$ , where a and b are integer from 0 to 2, c is an integer from 1 to 3 and the sum  $(a+b+c)$  is 4;  $\text{R}^1$ ,  $\text{R}^2$ , and  $\text{R}^3$ , are alkyl, cycloalkyl or aryl radicals with 1-18 carbon atoms.
21. Process for the polymerization of olefins of formula  $\text{CH}_2=\text{CHR}$ , in which R is hydrogen or a hydrocarbon radical having 1-12 carbon atoms, carried out in the presence of a catalyst according to one of the claims 17-20.



**ABSTRACT**

Adducts are provided comprising  $\text{MgCl}_2$ , ethanol and a Lewis base (LB), said compounds being present in molar ratios defined by the following formula  $\text{MgCl}_2 (\text{EtOH})_n(\text{LB})_p$  in which  $n$  is from 2 to 6 and  $p$  has values satisfying the following equation  $p/(n+p) \leq 0.1$ . The said adducts can be used as precursor in the preparation of high activity ZN catalysts.

5